

Development of autopilot Unmanned Smartboat Vehicle (AUSV) Based on Fishing Zone Prediction Map

By mohammad basuki rahmat10

PAPER • OPEN ACCESS


Development of Autopilot Unmanned Smartboat Vehicle (AUSV) Based on Fishing Zone Prediction Map

To cite this article: M B Rahmat *et al* 2020 *J. Phys.: Conf. Ser.* **1595** 012036

15
View the [article online](#) for updates and enhancements.


You may also like

- 1 [Study on BTT Coordinated Turn Autopilot](#)
- 22 [Design for Reentry Gliding Vehicle](#)
Li Qiang, Shui Yongtao, Wang Yonghai et al.
- 8 [Study of household welfare level of crab fishermen using Fisherman Exchange Rate \(FER\) indicators in East Lombok](#)
Sarif Husni, M. Yusuf, Muhammad Nursan et al.
- [Comparison of lung function between breath-holding diving and non-breath-holding diving fishermen in Ambon city](#)
J Luhulima, E C Oetama and J Mainase

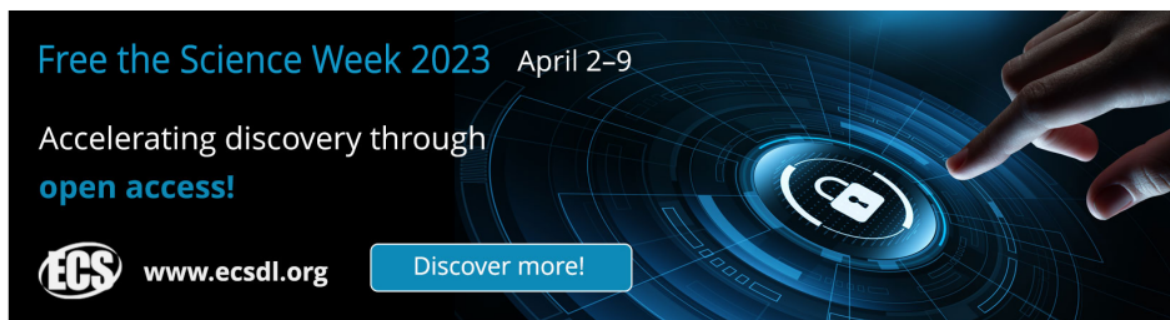

Free the Science Week 2023 April 2-9

Accelerating discovery through
open access!

 www.ecsdl.org [Discover more!](#)

The advertisement features a dark blue background with a futuristic, glowing interface. A hand is shown interacting with a circular control panel that has a padlock icon in the center. The text is in white and light blue, with the ECS logo and website URL in white. A blue button with white text says "Discover more!".

Development of Autopilot Unmanned Smartboat Vehicle (AUSV) Based on Fishing Zone Prediction Map

M B Rahmat¹, A Z Arfianto^{1,*}, T B Santoso², T Santoso¹, and N Gunantara³

¹ Department of Marine Electrical Engineering, Politeknik Perkapalan Negeri Surabaya, Surabaya, Indonesia

² Department of Electrical Engineering, Politeknik Elektronika Negeri Surabaya, Surabaya, Indonesia

³ Department of Electrical Engineering, Universitas Udayana, Bali, Indonesia

*Corresponding author: afifzuhri@ieee.org

Abstract. The potential of marine fish is one of the hopes for fishermen. Fishing boats have not been equipped with fish detection devices such as fish finders. To get to the location of fishing, fishermen do not know accurately the distance and direction of the ship. A fisherman only relies on experience and information from other fishermen to find out the location of the fish distribution. The ship's fuel losses are caused by fishermen having to go around to map fishing points. Accurate data for autopilot technology is needed to move the fishing boat to the point of distribution of fish, serves to help fishermen to increase fishing yields and reduce ship fuel losses. The 70 × 16 × 15 cm³ ship prototype with autopilot technology measures the distance between fishing boats and the target location of the nearest fish distribution. This prototype is equipped with a GPS and a compass sensor that shows the direction and difference of angles to the direction of the target. This prototype has a rudder that is driven by a servo motor based on the angle difference to the setpoint. Based on the results of research and testing, this prototype can run an average distance of 15.5 m. The results of angle accuracy testing, the prototype has an angle difference. The compass angle and bearing angle are an average difference of 35.33°.

1. Introduction

One of the navigation technologies on ships is autopilot. The use of ship's autopilot technologies to control maneuvers of rudder angle movements and automatic steering gear settings has not been used as a means of finding fish distribution points for fishers. Based on data obtained from the Central Statistics Agency of East Java Province that capture fisheries in 2013 - 2015 experienced an insignificant increase, in 2013, capture fisheries amounted to 386,895 to 416,529 tons in 2015 [1–3]. Within two years, an increase in the catch of East Java Province was 3.7%. The factors that cause it are fishing activities carried out by fishermen based on experience and information from other fishers, while the distribution point of the fish changes every time. One of the factors causing the distribution of fish to change is oceanographic factors. Oceanographic factors are factors that influence the physiological conditions of the fish that cause the fish to migrate according to their physiological conditions [4,5].

The technology for finding fish distribution points is a fishfinder. Fishers come to the location of the fish distribution to do the mapping, while each time the distribution of fish changes. The safety of fishers is at stake because the potential of the fish and its distribution point is in the middle waters. Fishers who use the fishfinder must also continue to search for the distribution point of their fish, based on experience or from other fishermen's information. Fishfinder only detects the waters under the ship. Fishers



Content from this work may be used under the terms of the [Creative Commons Attribution 3.0 licence](https://creativecommons.org/licenses/by/3.0/). Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

experience loss of time and fuel because they have to do mapping and searching manually. Today eco-friendly technology is an important issue. Not only in applied technology but also material that can absorb microwave energy [6,7]. Technology for optimization of fishing has been found by Affandi and Arfianto [8] with the concept of VMS (Vessel Messaging System). Also using website-based internet technology and radiofrequency. The service on the interactive website is to know the position of the ship and interactive messages between VMS service users (family, government, shipowner) and fishers at sea.

Autopilot is a system control application on moving vehicles such as airplanes, helicopters, or ships, which serve to stabilize the direction of motion in the desired time and the direction of the programmed path [8,9]. The development of autopilot prototypes is used for testing new control algorithms and the reliability of other electronic components such as sensors and microprocessors [10]. In the field of rocket control, the control system is used to guide the rocket in the desired direction. The rocket's track can be read from the inertia sensor or additional from GPS data. Changes in the motion of the rocket's path by changing the direction of the thrust of the rocket motor, or by rotating a few degrees of the tilt of the rocket's fins by utilizing the principle of aerodynamic forces. To develop this system, the use of a rate-gyroscope to calculating angles and a stable control actuator is an essential part of the system [11].

2. Literature Review

2.1. Fishing Zone Prediction Map

Fishing Zone Prediction Map (PPDPI) contains information on fishing area prediction and potential areas for pelagic fishing in Indonesian waters. The information on the PDPI map is regularly updated 3 times a week, (Monday, Wednesday, and Friday). This innovation is one of the tools for fishermen in determining fishing locations to optimize the catch quota. The PDPI map also provides information on wind direction and wave height so fishermen can predict weather conditions around fishing locations for sailing safety. Equipped with PDPI map information, fishermen can precisely find out and quickly head to the fishing ground area, thus can increase the effectiveness and efficiency of fishing, especially for fuel saving. The data show the distribution spots in the form of latitude and longitude. The following is a map of fish distribution data from 8 - 10 June 2018 [12].

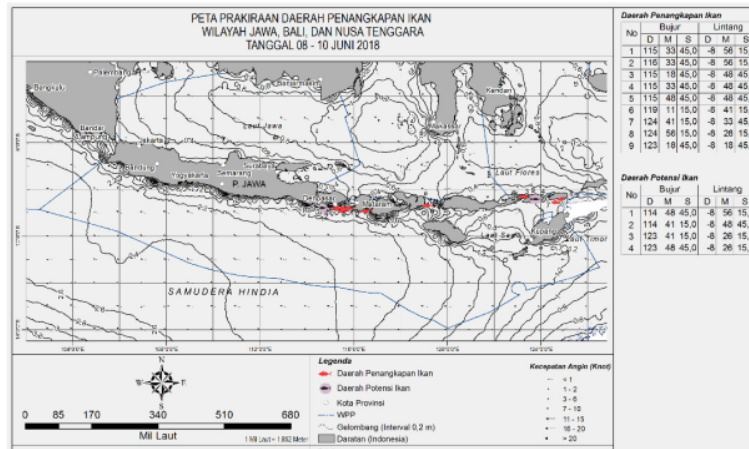


Figure 1. Fishing Zone Prediction Map (PPDPI)

As shown in Figure 1, the fishing spots are marked with a redfish symbol. Meanwhile, the potential fish area is marked with a blackfish symbol. The fishing spots and potential fish area have their location based on the coordinates

Table 1. Map Specification

Type	: Prediction of Fishing Zone
Purpose	: Fishery
Keyword	: PPDPI
Area	: Indonesia
Time span	: 2010-01-01 - now
Vertical Span	: -
Temporal Resolution	: Every 3-day (national), every day (fishing port and specific waters)
Spatial Resolution	: 4 km (national), 1 km (fishing port and specific waters)
Update	: everyday
Platform	: Aqua/Tera Satellite, Suomi NPP
Sensor	: MODIS, VIIRS
Format	: raster (.png), database (.dbf)

The map is prepared and intended for fishers with a fleet capacity of > 30 GT with predictive areas up to the high seas or Indonesia's Exclusive Economic Zone (EEZ). The National PDPI Map is compiled and published routinely 21 times a week (Monday, Wednesday, and Friday) and covers five territorial waters of Indonesia, namely: Sumatra, Kalimantan, Sulawesi, Maluku-Papua, Java Bali-Nusa Tenggara. The map was prepared and intended for traditional fishers (one-day fishing) who operate not too far from the coastal area, especially fishers who use ships <30 GT. Map of PDPI Fisheries Port is compiled and published routinely every day and covers 11 territorial waters of Indonesia, namely: PPN Ambon, PPS Belawan, PPS Cilacap, PPN Kejawanan, PPN Pelabuhan Ratu, PPN Pemangkat, PPN Pengambangan, and Perairan Bali, PPN Sungailiat, PPP Tamperan Pacitan, PPN Ternate Bitung, PPN Prigi. The map is arranged for specific waters that intersect with conservation areas where there are boundaries of restricted areas for fishing. This Specific Waters map is updated and published every day covering 3 territorial waters: North Bali (Bali Sea), East Bali (Lombok Strait), Savu Sea.

2.2. Autopilot Angle Calculation

Autopilot angle calculation works with Neo 7M GPS Modul. It captures signals from satellites that are converted at latitude and longitude coordinates. Neo 7M GPS Modul can be used to determine the ship's movement by uniting the coordinates of the destination and the initial coordinates of the ship. Alternatively, in determining the direction of the ship using the tilt angle from the primary angle of the north pole of the earth, so the formula that can be applied is the formula of polar coordinates and cartesian coordinates. Polar coordinates are handy one of them in astronomy. Polar coordinates can be used to prove the trigonometric identity formula, as well as the formula for the sum and difference of trigonometric comparison.

The material that can be taken is the size of angles, degrees, radians, and cycles, comparisons of trigonometry in right triangles, values of trigonometric comparisons in various quadrants, and trigonometric comparisons of related angles. Polar coordinates are coordinates on the cartesian which located on a circle $x^2+y^2=r^2$ so that the polar coordinates are often based on the radius of the circle (r) and the angle formed with the positive X-axis. Suppose the Cartesian coordinates of point A are (x, y) , and the polar coordinates of point A are (r, α) , the relation between the two points is $x = r \cos \alpha$, and $y = r \sin \alpha$. The steps to change coordinates to cartesian coordinates are as follows using the relationship: $x = r \cos \alpha$, and $y = r \sin \alpha$. Steps to change cartesian coordinates to polar coordinates:

Determine the radius (r) with the Pythagorean Equation 1.

$$r^2 = x^2 + y^2 \quad (1)$$

Determine the angle size with one of Equation 2.

$$\sin \alpha = \frac{y}{r} \quad (2)$$

$$\alpha = \text{Sin}^{-1} \frac{y}{x} \quad (3)$$

For the quadrant, there are four possibilities:

- x positive and y positive is in quadrant I,
- x negative and y positive is in quadrant II,
- x negative and y negative is in quadrant III,
- x positive and y negative is in quadrant IV,

3. Research Methodology

This stage is an activity to create a concept that is run on a prototype tailored to the background of the problems raised and research objectives. The concept of the system consists of identifying problems and designing system concepts in the form of system inputs and outputs. The following system design work in Figure 2.

The process of research methodology is, first designing the control diagram for the prototype. The function of the control diagram is to know the workflow of the control system on the prototype with the close-loop control process. The following diagram controls the closed-loop control in Figure 4.

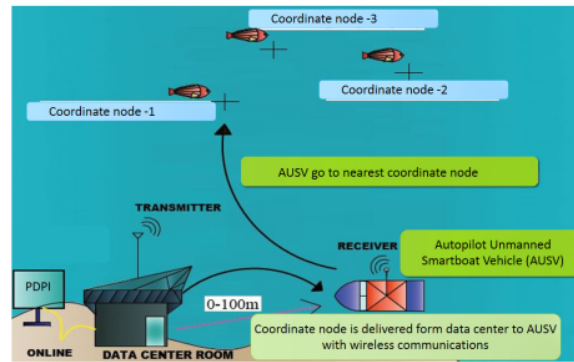


Figure 2. Autopilot Unmanned Smartboat Vehicle System.

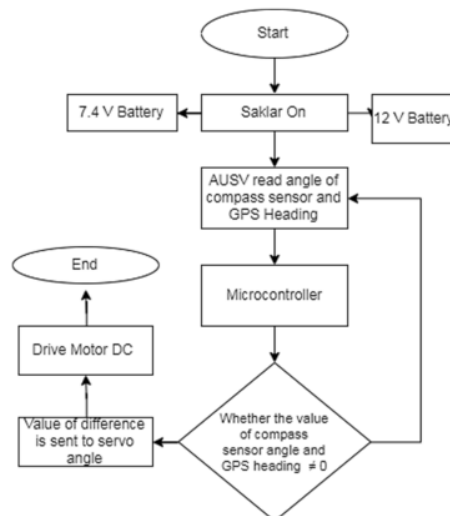


Figure 3. Flowchart of AUSV system

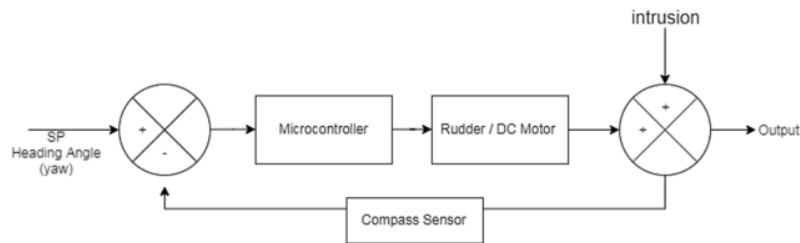


Figure 4. Control Model

The setting point is the GPS heading angle (yaw), which is the angle between the position of the target and the position of the ship. Arduino input is processed in the form of an error signal obtained from the yaw difference with the compass sensor reading angle. Arduino-processed error signals control the ship through servo motion. Outside disturbances that can occur when the ship's journey to the target point is in the form of wind and water waves that can affect the difference in angle between the yaw and the compass angle. The error signal is compared to the setpoint through the feedback signal of the compass sensor angle reading. The output of the system is the difference between the yaw angle as the setpoint and the compass sensor reading angle must be 0° .

This system works by sending fish distribution point data from the BPOL website to the data center. The data center is connected to the internet. Data of fish distribution points are sent to ships using radiofrequency with a distance between 0-100 m. The ship will receive the fish distribution point data sent by the transmitter and detect its location with the help of GPS sensors and compass sensors. The ship will go to the point of location for the distribution of fish on autopilot.

The receiver system concept consists of input, process, and output. The input consists of a compass sensor, GPS sensor, and destination location data input from the transmitter. Destination location data after received by the receiver and compass sensor and GPS sensor reading data, then processed by the microcontroller. The microcontroller process gives an order to the actuator in the form of a rudder movement control action with PWM servo motor and pm DC motor as the prime mover of the prototype. The buzzer is added as a prototype distance indicator with the destination location.

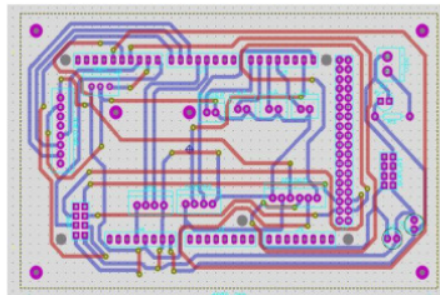


Figure 5. PCB design for on AUSV board

The transmitter system concept consists of input in the form of location data for fish distribution destination inputted via a PC or using a 4x4 matrix keypad. Input data is processed by the microcontroller and gives the command NRF2410 to send data to the receiver. Data sent by NRF24101 is displayed on a 20x4 LCD.

Wireless communication between microcontroller devices is needed for data communication between fishing stations and prototypes. The NRF24L01 module is a device designed for long-distance

communication that utilizes the 2.4 GHz RF band. This module uses the SPI interface to communicate. The working voltage of this module is 3.3 VDC. This module has eight pins including VCC (3.3 VDC), GND, CE, CSN, MOSI, SCK, and IRQ. Electric motors are electromagnetic devices that convert electrical energy into mechanical energy. DC motors or often called direct current motors are often used for poses that require speed regulation compared to AC machines.


The main reason for the use of DC machines, especially in the modern industry, is because the working speeds of DC motors are easily regulated. DC motors are well known for their diverse uses by combining various shunt windings that are shunted, series, or separately. A motor can be designed that can display the characteristics of volt-amperes or varying moment-speeds -sort for dynamic and fixed use.

Servo motor is a rotary device or actuator that is designed with a closed-loop feedback control system so that it can be set-up or set to determine and ascertain the angular position of the motor output shaft. Servo motor is a device consisting of a DC motor, gear circuit, control circuit, and potentiometer. Gear circuits attached to the DC motor shaft will slow the shaft rotation and increase the torque of the servo motor, while the potentiometer with its resistance changes when the motor rotates serves as a determinant of the position limit of the rotation of the servo motor shaft.

Servo motors are controlled by providing a Pulse Wide Modulation (PWM) signal via a control cable. The pulse width of the control signal provided will determine the rotation angle position of the servo motor shaft. For example, a pulse width of 1.5 ms (milliseconds) will rotate the shaft of the servo motor to an angular position of 90°. If the pulse is shorter than 1.5 ms, it will rotate in the 0° or left position (counter-clockwise), whereas if the pulse is given longer than 1.5 ms, the shaft of the servo motor will rotate in the 180° position or right (clockwise). Servo motor rotation is controlled by given a voltage source and control signal. The amount of the voltage source depends on the specifications of the servo motor used. Meanwhile, to control the rotation of the servo motor is done by sending a control pulse with a frequency of 50 Hz with a period of 20ms and different duty cycles. Where to move a servo motor of 90° pulses is required with a 1.5ms ton duty cycle of positive pulses and to move 180o requires a pulse width of 2 ms.


4. Result and Discussion

Prototype angle accuracy testing to ensure the performance of prototype accuracy with the bearing angle. The prototype runs according to trajectory and error does not until 90°. The test results data is shown in Table 2.

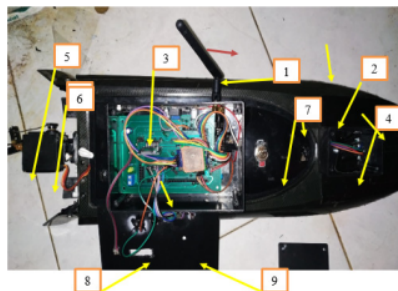

No	Part Name	No	Part Name
1	Antena Nrf24101	7	Switch
2	Hull	8	Buzzer
3	Box Control	9	Led Indicator
4	Compass Sensor		
5	Rudder		
6	Servo Motor		

Figure 6.a. Part of Prototype

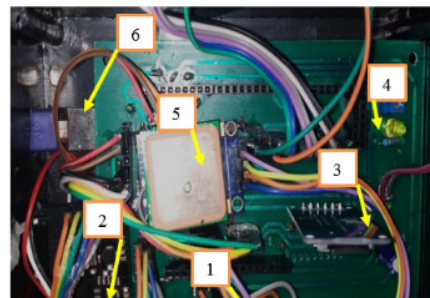

No	Electronic Component Name
1	Buck Converter
2	NRF24101
3	MicroSD
4	Led Indicator
5	GPS Sensor
6	USB Port

Figure 6.b. Electronic Component

Table 2. Testing data

No	Distance (m)	Compass Angle (°)	Bearing (°)	Error (%)	No	Distance (m)	Compass Angle (°)	Bearing (°)	Error (%)
1	19	349	323.35	25.65	11	8	323	325.39	2.39
2	18	298	323.66	25.66	12	7	325	326.52	1.52
3	16	324	319.91	4.09	13	6	327	330.01	3.01
4	15	332	318.11	13.89	14	5	333	332.12	0.88
5	14	325	316.31	8.69	15	4	339	337.33	1.67
6	13	309	314.93	5.93	16	3	347	343.62	3.38
7	12	312	315.23	3.23	17	1	348	324.19	23.81
8	11	327	315.94	11.06	18	2	345	116.75	228.25
9	10	329	317.15	11.85	19	2	0	116.75	116.75
10	9	326	322.35	3.65	20	2	336	124.73	211.27

The test was carried out twenty times. The results show that the prototype has an angle difference. The compass angle and bearing angle are an average difference of 35.33°.

5. Conclusion

Based on the making and testing of a pilot Unmanned Smartboat Vehicle (AUSV) based on Fishing Zone Prediction Map shows that the prototype can run an average distance of 15.5 m. The prototype has an angle difference. The compass angle and bearing angle are an average difference of 35.33°.

References

- [1] Duggan D E and Kochen M 2016 Small in scale but big in potential: Opportunities and challenges for fisheries certification of Indonesian small-scale tuna fisheries *Mar. Policy* **67** 30–9
- [2] Teramoto M, Suzuki M, Hatmanti A and Harayama S 2010 The potential of Cycloclasticus and Altererythrobacter strains for use in bioremediation of petroleum-aromatic-contaminated tropical marine environments *J. Biosci. Bioeng.* **110** 48–52
- [3] BPS 2017 *Statistik Sumber Daya Laut dan Pesisir 2017* ed S D S L Hidup (Jakarta: Badan Pusat Statistik (BPS))
- [4] Muawanah U, Pomeroy R S and Marlessy C 2012 Revisiting fish wars: conflict and collaboration over fisheries in Indonesia *Coast. Manag.* **40** 279–88
- [5] Suhartono H and Pailin J B 2013 Identifikasi dan Prediksi Daerah Penangkapan Ikan Kembung (*Rastrelliger spp.*) di Perairan Kabupaten Pangkep *J. Amanisal* **2** 55–65
- [6] Rahmat M B, Arfianto A Z, Setijadi E and Mauludiyanto A 2018 Test of microwave absorber of rice husk and burned rice husk *Proceeding - ICAMIMIA 2017: International Conference on Advanced Mechatronics, Intelligent Manufacturing, and Industrial Automation*
- [7] Rahmat M B, Rahmat M B, Arfianto A Z, Handoko C R, Setiawan E, Widodo H A, Hidayat E P, Mudjiono U, Sidi P, Handoko L, Hamzah F, Setijadi E, Mauludiyanto A and Hidayat D 2018 The Use of Free Space Measurement Method to Identify Dielectric Constant of Rice Husks *Int. J. Eng. Technol.* **7** 120–3
- [8] Widada W, Pusat P and Wahana T 2006 Rancang Bangun Prototipe Sistem Heading Autopilot Berbasis Ra Te-Gyroscope Dan LAPAN *Jkt. 2006* **Vol. 4** No.
- [9] Widodo R B, Quita R M, Amrizal S, Gunawan R S, Wada C, Ardiansyah A, Sutrisno I, Rahmat M B, Arfianto A Z, Handoko C R, Santoso A D, Santosa A W B, Ardhana V Y P and Setiawan E 2019 Grasping and Attached Mode in Human-Computer Interaction in the Study of Mouse Substitution *J. Phys. Conf. Ser.* **1196** 012034
- [10] Atmoko R A, Yang D, Abas M I, Arfianto A Z and Rahim R 2019 Teleoperation cloud industrial robot using XMPP protocol *Int. J. Recent Technol. Eng.* **8** 6280–4
- [11] Watiasih R, . P and . S 2017 Rancang Bangun Purwarupa Robot Kapal Pendeteksi Limbah Minyak *Pros. Semin. Nas. Teknol. Elektro Terap.* **1** 25–30

- [12] Sanjaka P A *Peta Prakiraan Daerah Penangkapan Ikan, untuk Kesejahteraan Nelayan Bangka Belitung (bagian 1)*

Development of autopilot Unmanned Smartboat Vehicle (AUSV) Based on Fishing Zone Prediction Map

ORIGINALITY REPORT

42%

SIMILARITY INDEX

PRIMARY SOURCES

- | | | |
|---|---|-----------------|
| 1 | iopscience.iop.org
Internet | 341 words — 10% |
| 2 | www.researchgate.net
Internet | 202 words — 6% |
| 3 | L Ardhenta, R K Subroto, R N Hasanah. "Adaptive backstepping control for Buck DC/DC converter and DC motor", Journal of Physics: Conference Series, 2020
Crossref | 147 words — 5% |
| 4 | joiv.org
Internet | 124 words — 4% |
| 5 | seaninstitute.org
Internet | 65 words — 2% |
| 6 | Ain Sahara, Riza Hadi Saputra, Baba Hendra. "Object Separation System Based on Height Differences Automatically", Journal of Physics: Conference Series, 2021
Crossref | 64 words — 2% |
| 7 | porto.polito.it
Internet | 51 words — 2% |
| 8 | C W Yanti, R Metalisa, L Bathara, V B Saragih. "Income Contribution Based on Fishing Gear of The | 50 words — 2% |

Duano Tribe, Indragiri Hilir, Riau", IOP Conference Series: Earth and Environmental Science, 2022

Crossref

-
- 9 en.jualplcinverter.com 48 words — 1%
Internet
-
- 10 thescipub.com 39 words — 1%
Internet
-
- 11 A Parastiwi, P C M Al-Akbary, H K Safitri. "Analysis and testing of DC motor control system for electric bike", IOP Conference Series: Materials Science and Engineering, 2020 28 words — 1%
Crossref
-
- 12 William R. Gondin, Bernard Sohmer. "VARIABLES, FUNCTIONS, AND GRAPHS", Elsevier BV, 1967 25 words — 1%
Crossref
-
- 13 M Rifai, A Z Arfianto, A T Muzazanah. "Radio Frequency-based Smart Control for Lighting in Public Service", Journal of Physics: Conference Series, 2020 24 words — 1%
Crossref
-
- 14 A Najmurrokhman, K Kusnandar, F Maulana, B Wibowo, E Nurlina. "Design of a prototype of manipulator arm for implementing pick-and-place task in industrial robot system using TCS3200 color sensor and ATmega2560 microcontroller", Journal of Physics: Conference Series, 2019 22 words — 1%
Crossref
-
- 15 repository.lppm.unila.ac.id 21 words — 1%
Internet
-
- 16 Desi Fatkhi Azizah, Khen Dedes, Agung Bella Putra Utama, Aripriharta. "DC Motor Speed Modeling and 20 words — 1%

Simulation Using Fuzzy Logic Control Method", 2021 7th International Conference on Electrical, Electronics and Information Engineering (ICEEIE), 2021

Crossref

17 Eli Maor. "On the Addition of Planar Rotations", International Journal of Mathematical Education in Science and Technology, 2006 17 words — 1%

Crossref

18 Andi Ray Hutauruk, Jomen Pardede, Pangeran Aritonang, Rosari Fernanda Saragih, Albert Sagala. "Implementation of Wireless Sensor Network as Fire Detector using Arduino Nano", 2019 International Conference of Computer Science and Information Technology (ICoSNIKOM), 2019 15 words — < 1%

Crossref

19 Rajakannu Amuthakkannan, K. Vijayalakshmi, Saleh Al Araimi, Maamar Ali Saud Al Tobi. "A Review to do Fishermen Boat Automation with Artificial Intelligence for Sustainable Fishing Experience Ensuring Safety, Security, Navigation and Sharing Information for Omani Fishermen", Journal of Marine Science and Engineering, 2023 12 words — < 1%

Crossref

20 www.cs.sfu.ca 11 words — < 1%

Internet

21 www.yumpu.com 11 words — < 1%

Internet

22 Guangxing Tan, Ying Ding, Dandan Fu, Yuchen Wang. "A distortion image correction method based on machine vision", Journal of Physics: Conference Series, 2020 8 words — < 1%

Crossref

23 Lilik Subiyanto, A.Z. Arfianto, S. Alfuat, D.P. Riananda et al. "Mobile Application for Unmanned Ship Monitoring Based on LoRA Communication", 2021 8th International Conference on Electrical Engineering, Computer Science and Informatics (EECSI), 2021 7 words — < 1%
Crossref

24 R B Widodo, R M Quita, S Amrizal, R S Gunawan et al. "Grasping and Attached Mode in Human-Computer Interaction in the Study of Mouse Substitution", Journal of Physics: Conference Series, 2019 7 words — < 1%
Crossref

EXCLUDE QUOTES OFF

EXCLUDE SOURCES OFF

EXCLUDE BIBLIOGRAPHY ON

EXCLUDE MATCHES OFF